

DATA SHEET

TABLETOP MACHINE MINI MAX



TECHNICAL DATA



Inner chamber dimensions	285 x 350 x 105 150 mm*
External dimensions	360 x 505 x 240 330 mm*
Seal length	260 mm
Vacuum pump	4 m ³ /h 8 m ³ /h
Control system	Z 2001 SENSOR
Weight	28 kg 33 kg
Power supply	1 phase, 230 V, 50 Hz**



* width x depth x height
** special voltages on request

All dimensions are approximate.
We reserve the right to make technical changes
and improvements without notice.

INSPIRING VACUUM TECHNOLOGY

- Perfect finish
- Easy handling
- Precise control system
- Maximum durability
- Wide range of applications
- 99% vacuum
- Proof and reliable sealing
- Simple cleaning
- Service-friendly

MACHINE STRUCTURE



Cover closing mechanism



Insertion plates for volume reduction and height regulation



Cable-free sealing systems



High-quality, stable acrylic lid

Protected suction unit

Deep-drawn vacuum chamber with no welding seams

User-friendly digital control Z 2001 SENSOR

Non-slip rubber feet


Plug-and play unit with integrated vacuum pump

CONTROL SYSTEM


Our Z 2001 SENSOR control system is equipped with a precision sensor and allows precise adjustment of important operation parameters: vacuum, gas and sealing.

Benefits:


- 5 shortcut buttons
- H₂O program for automatic packaging of liquid products
- Maximum vacuum to minimize germ growth
- Service program for the longevity of the machine
- Marinade program for HORECA-use (Hotel, Restaurant, Catering)
- 99-program memory

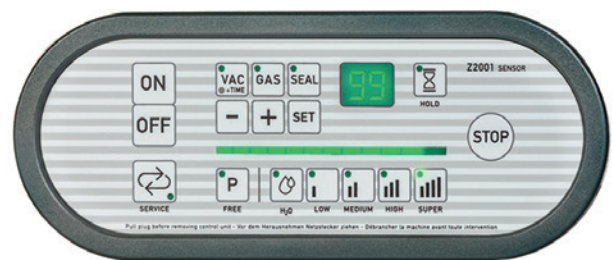


Ultimate pressure controlled evacuation with auto-stop function



Service program

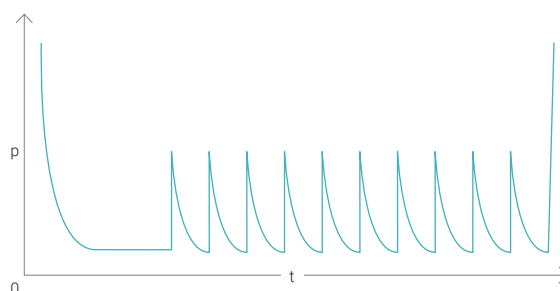

Marinade program, outgassing program



VACUUM PUMP

Our Boss vacuum packaging machines are equipped with powerful oil-lubricated rotary vane vacuum pumps made by company Busch.


Technical data	Busch	
Nominal pumping speed	4 m ³ /h	8 m ³ /h
Ultimate pressure (mBar)	2	2
Nominal motor rating (kW)*	~ 0,1	~ 0,35
Nominal motor speed (U/min)	3000	3000
Noise level (ISO 2151) (dB)	59	58
Oil capacity (liter)	0,06	0,25

* depends on the voltage supply




SEALING SYSTEMS


Double sealing




Simple cut-off sealing



Double flat wire:
6 x 0,3 mm



Round wire: 1,0 mm Ø
Flat wire: 3 x 0,2 mm



ACCESSORIES

1. Dome lid (usable height 150 mm, external height 330 mm)
2. Slanted bag holder for packaging of liquids (stainless steel)
3. Sucking device for standardized catering boxes
4. Set of wearing parts (teflon, wire, lid gasket, silicone for pressure bar)
5. Packaging (stable cardboard box on wooden pallet)

